

YL-FL01 Floodlight



SUPERIOR QUALITY & HIGH BRIGHTNESS

Features & Benefits

- Die-casting technology by ADC12, excellent thermal management, reduce the temperature difference and ensure the lumen depreciation.
- 4mm tempered glass, Integrated Breather Valve: Balances The Internal & External Temperature and Humidity
- Offset bracket design, Racked Angle $\pm 120^\circ$ adjustable, Allows For Precise Installation
- Ingress Protection Rating: IP66
- Operation Temperature: -25°C - $+50^\circ\text{C}$
- 4000K, 5000K, 5700K Adjustable
- CRI >70, 80
- 5 years Warranty



150lm/W



IP66



IK08



Warranty



CCT Selectable



Power Selectable

YL FL01 Floodlight

key Features

Beam angle options
30°/60°/90°/70°*150°

4mm tempered glass cover

IP66 and IK08 Rated


Die-cast aluminum housing



Readable adjustment
scale allows for precise
Installation

Offset bracket design makes
the mounting much easier
without removing
the bracket

3CCT Selectable
3000K/4000K/5700K
4000K/5000K/6500K
Power Selectable
100% -75% -50%




Full Power Optional


7 wattages with 6 sizes achieves
the highest cost-performance.




Dimension

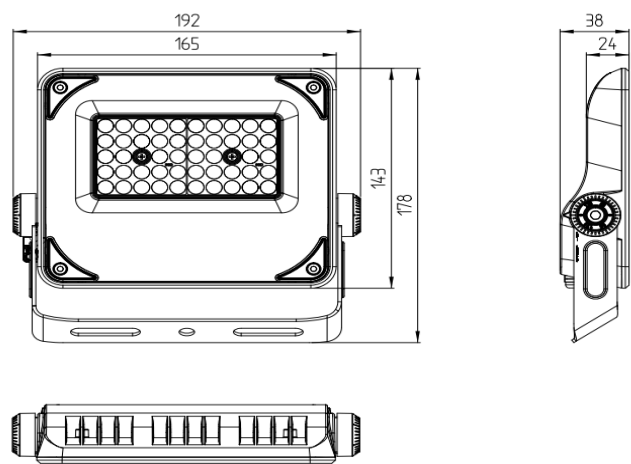

30W

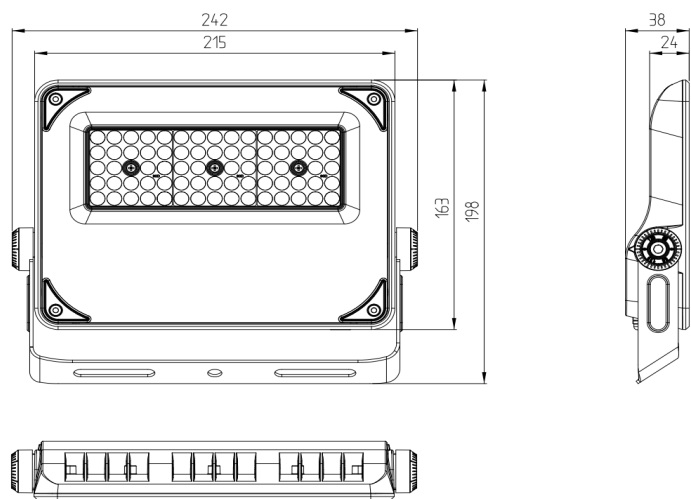

50W

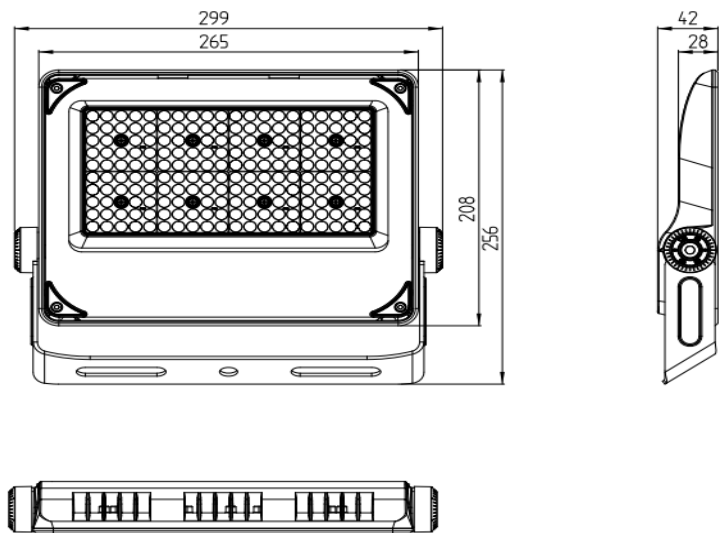


100W




YL- FL01 Floodlight


Dimension

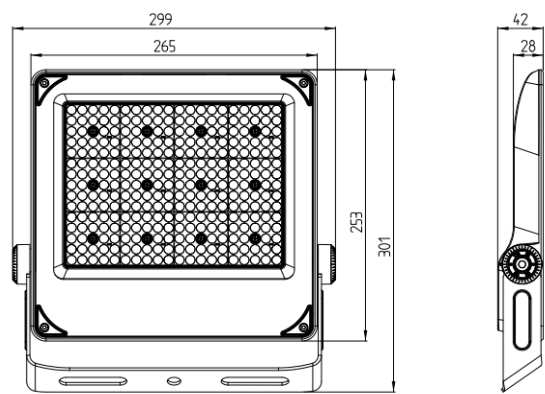

150W

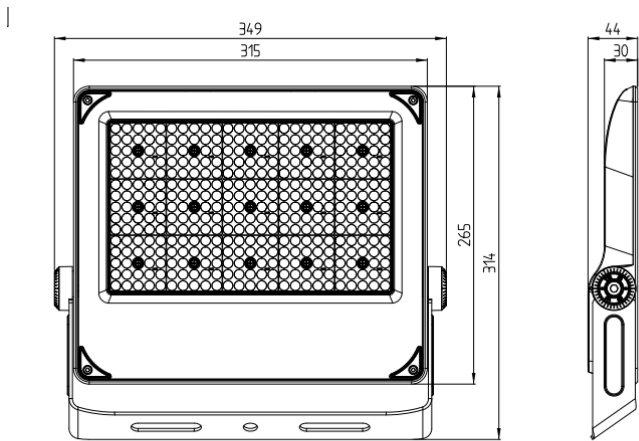

200W

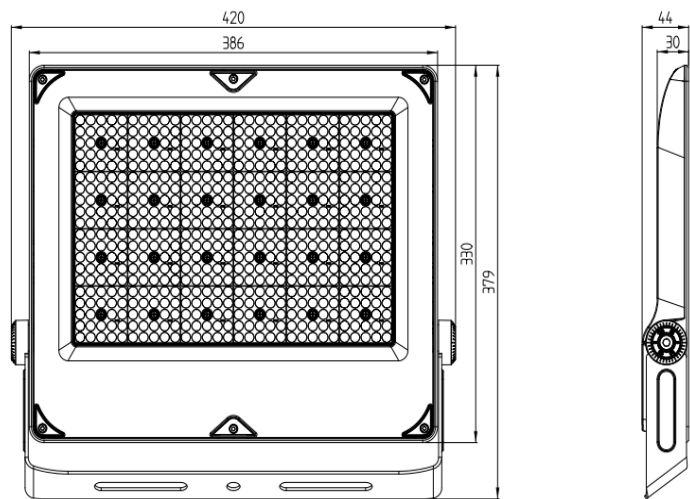

250W / 300W



Specifications